


BOE MLED BKY-A Series

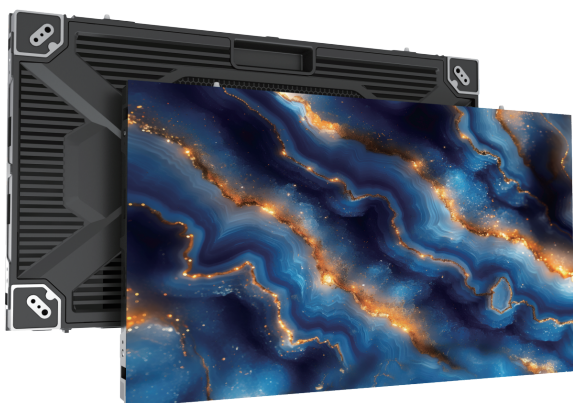

Key Features

Thin and Lightweight

- 3.5kg/pcs

All-in-one Board Design

- Hard Connection

Maintenance is convenient

- All components can be disassembled from the front.

3840 Hz

- High refresh rate
- 14 bit grayscale

Right-angle splicing

- Cabinet support 45°

Intelligent MDL

- MDL support flash function

Application Scenarios

Commercial | Public screen | Data center | Exhibition | Conference

BKY-A Series	BKY012A1	BKY015A1	BKY018A1
Pitch(mm)	1.25	1.5625	1.875
Module composition	2*2	2*2	2*2
Cabinet resolution(dot)	480*270	384*216	320*180
Cabinet dimension	600*337.5	600*337.5	600*337.5
Panel material	Die-casting Aluminium	Die-casting Aluminium	Die-casting Aluminium
Refresh rate(Hz)	3840	3840	3840
Maintenance mode	Front	Front	Front