


BOE MLED BTS Series

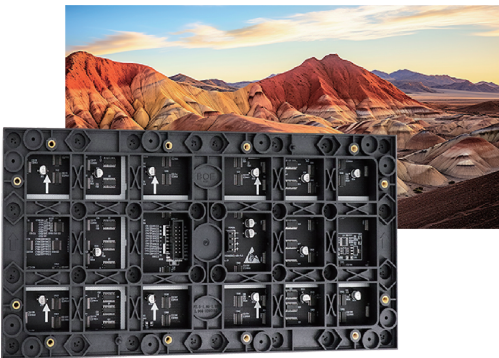

Key Features

- IP65 protection level, safe and stable
- Seamless splicing and fast installation
- Self-cooling structure for efficient heat dissipation
- Simplified mechanical design for easy maintenance
- Common cathode option available

Application Scenarios

Outdoor display | Digital advertisement | Billboard

BTS Series	BTS025	BTS030	BTS040	BTS050	BTS060	BTS080	BTS100
Pitch(mm)	2.5	3.076	4	5	6.67	8	10
Module Resolution	128*64	104*52	80*40	64*32	48*24	40*20	32*16
Module Size (mm)	320*160	320*160	320*160	320*160	320*160	320*160	320*160
Pixel Density (dot/m²)	160,000	105,625	62,500	40,000	22,500	15,625	10,000
Brightness(nit)	≥5000	≥5000	≥5000	≥5000	≥4300	≥4200	≥5000
Maintenance Mode	Rear Maintenance						
Typical Lifespan(hrs)	≥100,000						
Operating Temperature Range (℃)	-20 ~50						
Operating Humidity Range(RH)	10~90%,no condensation						