


BOE MLED BTX Series

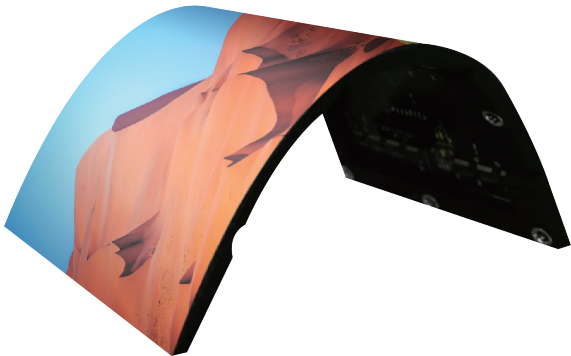

Key Features

- Soft and Light
- Strong Magnetic Adsorption
- Good Bending Performance

Application Scenarios

Commercial | Public screen | Exhibition

BTX Series	BTX-FL012A	BTX-FL015A	BTX-FL018A	BTX-FL020A	BTX-FL025A
Pitch (mm)	1.25	1.538	1.86	2	2.5
Pixel Density (dot/m²)	640,000	422,500	288,906	250,000	160,000
LED Type	SMD1010	SMD1212	SMD1515	SMD1515	SMD2121
Module Size (mm)	320*160	320*160	320*160	320*160	320*160
Module Resolution	256*128	208*104	172*86	160*80	128*64
Horizontal Viewing Angle (°)	150				
Vertical Viewing Angle (°)	130				
Brightness (nit)	≥450				
Refresh Rate (Hz)	3840				
Bending Angle	120°-180°				
Operating Temperature (°C)	-10°C-40°C				
Operating Humidity (RH)	10%-60%RH(no condensation)				