


BOE MLED BTX-TP Series

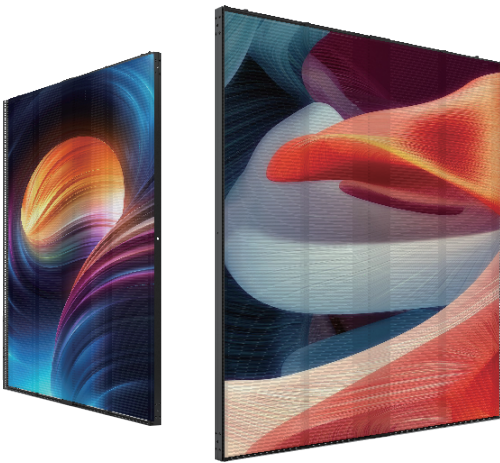

Key Features

High brightness and high transparency

- The transparency rate can reach 42%-80% (varying with spacing)

Extremely thin

- The thickness is only 68mm, and the lightest weight can reach 6kg/m²

Multiple sizes available

- 500*500 / 500*1000 / 1000*500 / 1000*1000mm

Application Scenarios

Retail stores | Chain stores | Shopping malls

BTX-TP Series	BTX2652TPA	BTX2652TPA	BTX3978TPA	BTX3978TPA	BTX1010TPA	BTX3978TPB	BTX1010TPB
Pixel Pitch(mm)	H2.6-V5.2	H2.6-V5.2	H3.9-V7.8	H3.9-V7.8	H10.4-V10.4	H3.9-V7.8	H10.4-V10.4
Brightness (nit)	1000	4500	2000	4000	4500	6000	5500
SMD	SMD2121	SMD1921	SMD1921	SMD1921	SMD1921	SMD3512	SMD3512
Panel size	1000*1000 / 1000*500 / 500*1000 / 500*500					1000*1000	1000*1000
Hollowout Ratio	42%	42%	51%	51%	60%	70%	80%
Average Power (W/m ²)	165	225	115	225	225	215	225